

Monoblocco



- Security fitting for PEX/AluPex
- Thread: M22x1,5
- Patented preassembled cone
- Temperature: 100°C
- Fits all Pex pipes according to correct dimension
- Pressure class: PN 10

Description *Monoblocco*

Area of use


Monoblocco is used to connect Pex, AluPex and Gerpex pipes with MMA products. The fitting is used in heating-and cooling systems.

Description

Monoblocco is a complete fitting, with no loose details. This means that you do not need to preassemble the nut and cone.

Cut the pipe and make it free from grades. Mount by pushing the pipe into the bottom of the fitting.

The fitting is designed, so that you can see in the small window, when the pipe has reached the bottom of the fitting.

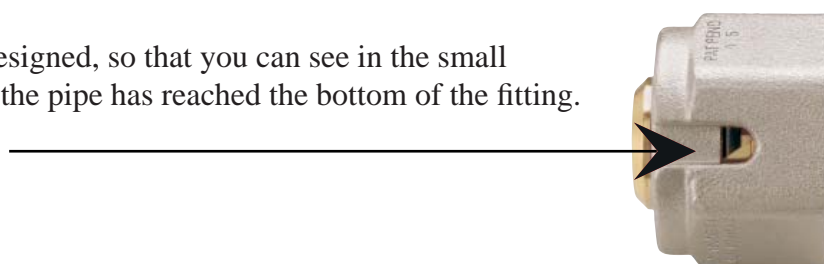

M22x1,5 fits MMA's products that have M22x1,5 connections to, for example distributors, valves and couplings. The coupling is marked for the connection type.

The fitting is also tested to fit Pex and AluPex according to ISO standards specified under technical info.

The pipes must be according to the dimensions indicated by the technical info on the fitting. For example 16x2 is a pipe with 16 mm outer diameter and 2 mm material thickness.

Technical data *Monoblocco*

Material

Brass, EPDM

Temperature

100°C

Pressure class:

PN 10

Pipe standards

SS-ISO 15875 Pex

SS-EN ISO 21003-2 AluPex



Product Information *Monoblocco*

Ordering codes



Article number	Designation	Description
4164233	Fitting Pex M22/15/2,5	M22 fitting for DN15 pipes with thickness 2,5mm 2-pack
4164234	Fitting AluPex M22/16/2	M22 fitting for DN16 pipes with thickness 2mm 2-pack
4164235	Fitting Pex M22/16/2,2	M22 fitting for DN16 pipes with thickness 2,2mm 2-pack

Note that Monoblocco is only sold in 2-pack. When placing an order, indicate how many packages with 2 fittings you want to buy.

